




Oxygen Hand Booster

TOTALLY ENCLOSED MILITARY DESIGN

The Haskel oxygen hand booster has been developed for the manual charging of life support and resuscitation cylinders in areas where there is no power supply (electrical or compressed air) available

The hand booster incorporates many of the key features of the standard

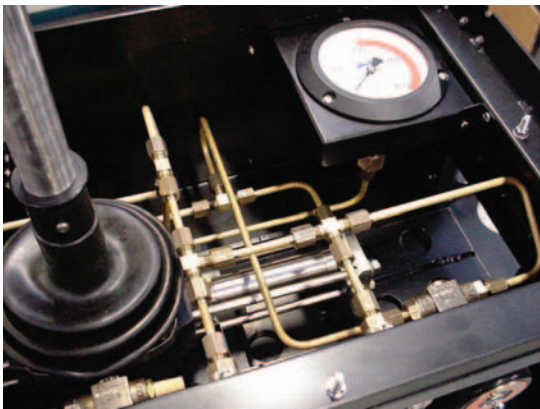

KEY FEATURES

- Double acting for effective operation
- Balanced piston design uses incoming gas to assist the pumping operation
- No risk of contamination into the oxygen gas sections
- Self lubricated oxygen seals require no lubrication
- Patented Haskel sealing arrangement in the high pressure sections ensure long working seal life
- Double handle arrangement for one or two man operation
- Portable and lightweight
- Compact and durable
- Reliable and easy to maintain
- Totally self contained unit requiring only two connections
 - ◇ one gas input
 - ◇ one gas output
- Capable of boosting oxygen gas from supply cylinders to 5,000 psi



Description

Haskel Military Spec. Oxygen Hand Booster Part Number 80818

At the heart of the unit is a positive displacement double acting reciprocating pump driven by either one or two operators. At the commencement of the suction stroke the inlet non-return valve will open allowing gas into the gas barrel. On the discharge stroke the inlet check valve will close and the outlet check valve will open. This will force the pressurised gas into the discharge pipe-work. The maximum pressure capability is dependant on the force applied by the operator (s) and the gas inlet pressure available.

If a high gas inlet pressure is available the work needed to complete the gas transfer is reduced.

Built into the booster are:

- ◇ Inlet gas filter,
- ◇ Inlet & outlet Pressure Gauges
- ◇ Outlet Relief valve
- ◇ Outlet Stop & Vent valves
- ◇ Inlet and outlet bulkhead connections with dust caps for when not in use

The unit comes totally enclosed in a lightweight frame suitably piped for oxygen gas service and is set for charging to 2900 psig/200 bar unless requested otherwise.

To order specify part number 80818

Technical Details

Dimensions	29.5" x 13" x 13"	750mm x 330mm x 330mm
Weight	66 lbs	30 kgs
Inlet Connection	1/4" FNPT	5/8" BSP X 60° male cone
Outlet Connection	1/4" FNPT	5/8" BSP X 60° male cone
Displacement per Cycle	-2.2 In ³	0.036 litre
Maximum Outlet Pressure	500 psig	350 bar g
Minimum Supply Pressure	290 psig	20 bar g

Booster Capacity Based on 40 strokes/min					
Inlet		Outlet		Flow	
Bar	PSI	Bar	PSI	NL/min	SCFM
100	1450	110	1600	72	2.54
75	1090	150	2200	51	1.8
50	725	205	3000	22	0.8
25	360	205	3000	7	0.26

Haskel Asia
 123 Tagore Lane #03-06
 Tagore 23 Warehouse Complex
 Singapore 787601
 Tel: 65-6455-7559 - Fax: 65-6455-2841
 www.haskel.com.sg

Haskel International, Inc.
 100 East Graham Place, Burbank, CA 91331 USA
 Tel: 818 841 4291, Fax 818 841 4291,
 E-mail sales@haskel.com Web: www.haskel.com

Haskel Australasia
 P.O. Box 267
 Salisbury, Qld. 4107, Australia
 Tel: 61-7-3277-9118 - Fax: 61-7-3277-6129
 www.haskel.com.au